

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US05/000399

International filing date: 07 January 2005 (07.01.2005)

Document type: Certified copy of priority document

Document details: Country/Office: US  
Number: 60/534,833  
Filing date: 07 January 2004 (07.01.2004)

Date of receipt at the International Bureau: 21 February 2005 (21.02.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

1282788

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

*February 08, 2005*

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/534,833

FILING DATE: *January 07, 2004*

RELATED PCT APPLICATION NUMBER: *PCT/US05/00399*



Certified by

Under Secretary of Commerce  
for Intellectual Property  
and Director of the United States  
Patent and Trademark Office

010704

22763 U.S. PTO

PTO/SB/18 (08-03)

Approved for use through 07/31/2008. OMB 0651-0032  
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**PROVISIONAL APPLICATION FOR PATENT COVER SHEET**

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. ER256045309US


15757 U.S. PTO  
60/534633

010704

INVENTOR(S)					
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)			
Richard F. Charles G.	Dawson Walker	Clinton, Louisiana Baton Rouge, Louisiana			
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (500 characters max)					
VACUUM CONTAINER SYSTEM AND RELATED METHOD					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
<input checked="" type="checkbox"/> Customer Number		2071			
OR					
<input type="checkbox"/> Firm or Individual Name					
Address					
Address					
City		State		ZIP	
Country		Telephone		Fax	
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification	Number of Pages	10	<input type="checkbox"/> CD(s), Number		
<input checked="" type="checkbox"/> Drawing(s)	Number of Sheets	4	<input checked="" type="checkbox"/> Other (specify)	Postcard	
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT					
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.				FILING FEE AMOUNT (\$)	
<input type="checkbox"/> A check or money order is enclosed to cover the filing fees					
<input checked="" type="checkbox"/> The Director is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number		502768		\$80.00	
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,

SIGNATURE

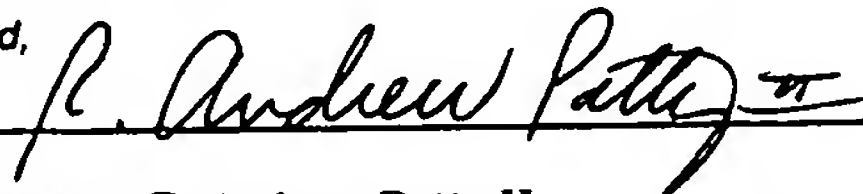

Date

1/7/2004

REGISTRATION NO.

38,992

TYPED or PRINTED NAME R. Andrew Patty II

(if appropriate)

Docket Number:

S-817

TELEPHONE

225-291-4600

**USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT**

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Mail Stop Provisional Application.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.



Express Mail #ER256045309US

PTO/SB/17 (10-03)  
Approved for use through 07/31/2008. OMB 0851-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# FEE TRANSMITTAL for FY 2004

Effective 10/01/2003. Patent fees are subject to annual revision.

☒ Applicant claims small entity status. See 37 CFR 1.27

TOTAL AMOUNT OF PAYMENT (\$) \$80.00

## Complete if Known

Application Number —  
Filing Date HEREWITH  
First Named Inventor Richard F. Dawson  
Examiner Name —  
Art Unit —  
Attorney Docket No. S-817

## METHOD OF PAYMENT (check all that apply)

☐ Check ☐ Credit card ☐ Money Order ☐ Other ☐ None

☒ Deposit Account:

Deposit Account Number 502768

Deposit Account Name Sieberth & Patty, L.L.C.

The Director is authorized to: (check all that apply)

☒ Charge fee(s) indicated below ☒ Credit any overpayments

☒ Charge any additional fee(s) or any underpayment of fee(s)

☐ Charge fee(s) indicated below, except for the filing fee to the above-identified deposit account.

## FEE CALCULATION

### 1. BASIC FILING FEE

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
1001	770	2001	385	Utility filing fee	
1002	340	2002	170	Design filing fee	
1003	530	2003	265	Plant filing fee	
1004	770	2004	385	Reissue filing fee	
1005	160	2005	80	Provisional filing fee	80.00
SUBTOTAL (1)				(\$)	\$80.00

### 2. EXTRA CLAIM FEES FOR UTILITY AND

Total Claims		Extra Claims		Fee from below		Fee Paid
Independent Claims		-20** =	0	X		0.00
Multiple Dependent		-3** =	0	X		0.00

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
1202	18	2202	9	Claims in excess of 20	
1201	86	2201	43	Independent claims in excess of 3	
1203	290	2203	145	Multiple dependent claim, if not paid	
1204	86	2204	43	** Reissue independent claims over original patent	
1205	18	2205	9	** Reissue claims in excess of 20 and over original patent	
SUBTOTAL (2)				(\$)	\$0.00

\*\*or number previously paid, if greater. For Reissues, see above

## FEE CALCULATION (continued)

### 3. ADDITIONAL FEES

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
1051	130	2051	65	Surcharge - late filing fee or oath	
1052	50	2052	25	Surcharge - late provisional filing fee or cover sheet	
1053	130	1053	130	Non - English specification	
1812	2,520	1812	2,520	For filing a request for ex parte reexamination	
1804	920*	1804	920*	Requesting publication of SIR prior to Examiner action	
1805	1,840*	1805	1,840*	Requesting publication of SIR after Examiner action	
1251	110	2251	55	Extension for reply within first month.	
1252	420	2252	210	Extension for reply within second month	
1253	950	2253	475	Extension for reply within third month	
1254	1,480	2254	740	Extension for reply within fourth month	
1255	2,010	2255	1,005	Extension for reply within fifth month	
1401	330	2401	165	Notice of Appeal	
1402	330	2402	165	Filing a brief in support of an appeal	
1403	290	2403	145	Request for oral hearing	
1451	1,510	1451	1,510	Petition to institute a public use proceeding	
1452	110	2452	55	Petition to revive - unavoidable	
1453	1,330	2453	665	Petition to revive - unintentional	
1501	1,330	2501	665	Utility issue fee (or reissue)	
1502	480	2502	240	Design issue fee	
1503	640	2503	320	Plant issue fee	
1460	130	1460	130	Petitions to the Commissioner	
1807	50	1807	50	Processing fee under 37 CFR § 1.17(q)	
1806	180	1806	180	Submission of Information Disclosure Statement	
8021	40	8021	40	Recording each patent assignment per property (times number of properties)	
1808	770	2808	385	Filing a submission after final rejection (37 CFR § 1.129(a))	
1810	770	2810	385	For each additional invention to be examined (37 CFR § 1.129(b))	
1801	770	2801	385	Request for Continued Examination (RCE)	
1802	900	1802	900	Request for expedited examination of a design application	

Other fee (specify) \_\_\_\_\_

\*Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$)

## SUBMITTED BY

Name (Print/Type) R. Andrew Patty II Registration No. 38,992 Telephone 225-291-4600  
Signature R. Andrew Patty II Date 1/7/2004

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on

This collection of information is required by 37 CFR 1.17 and 1.27. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

## **VACUUM CONTAINER SYSTEM AND RELATED METHOD**

### **FIELD OF THE INVENTION**

[0001] The present invention relates to apparatus and systems for transferring material into a bulk bag using a vacuum, and especially to pump or vacuum systems configured for transferring liquid, particulate or slurry materials into bulk bag containers for transport, storage, disposal and/or de-watering.

### **SUMMARY OF THE INVENTION**

[0002] The present invention enables the facile placement of solid particulate, liquid or slurried materials into bulk bags configured for commercial-scale operations which could range from volumes smaller than one cubic meter to volumes of 5, 10, 20 and over 30 cubic meters, depending upon the application, size of containers and other equipment, weight restrictions and the like. Various commercial settings require the placement of material into a substantially nonporous, flexible bag in order to facilitate the transportation, storage or disposal of the material involved. The material involved can vary widely from non-hazardous, non-toxic materials such as, e.g., grain, vegetable and other food products, particulate insulation material, to hazardous or toxic materials such as, e.g., paint or other chemical or petrochemical pit slurries, waste treatment pond dredgings or liquids, and the like. The present invention provides a system which enables the repeated and rapid placement of such materials into a disposable or reusable bag configured to retain the material so that an outer vacuum container employed within the system can be reused for subsequent loadings without the inconvenience or cost of significant cleaning procedures in between loads.

[0003] Thus, in one embodiment of this invention is provided apparatus comprising (a) a substantially rigid container defining at least one inlet port and at least one outlet port, and being sized and configured to define a first volume for receiving a liquid, solid particulate or slurry material; (b) flexible, substantially non-porous bag which forms a bag opening perimeter in sealed attachment to the container at the inlet port and being in an initial deflated state; and (c) a vacuum pump in fluid communication with the rigid container through said outlet port, wherein during operation of the vacuum pump, a vacuum is created within the rigid container to thereby cause the bag in an initial deflated state to expand and form a vacuum within the bag to draw material through the inlet port and into the bag..

[0004] In another embodiment of the invention is provided apparatus comprising (a) a substantially rigid container defining at least one inlet port, at least one outlet port and at least one sealable bladder port, and being sized and configured to define a first volume for receiving a liquid, solid particulate or slurry material; (b) a flexible, substantially porous bag which forms a bag opening perimeter in sealed attachment to the container at the inlet port and being in an initial deflated state; and (c) a vacuum pump in fluid communication with the rigid container through said outlet port, wherein during operation of the vacuum pump, a vacuum is created within the rigid container to thereby cause the bag in an initial deflated state to expand and form a vacuum within the bag to draw material through the inlet port and into the bag. This embodiment enables, amongst other things, the facile de-watering of slurried solids. When a bladder is placed across the bladder port and the port is open to the atmosphere outside the container, and when the inlet is closed during operation of the vacuum pump, even greater amounts of liquid can be removed from the slurry material within the bag, enabling for example the efficient de-watering of solids in the original slurry.

[0005] These and other embodiments, objects, advantages, and features of this invention will now become apparent from the following description, accompanying drawings and appended, non-limiting, exemplary claims.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0006] Figure 1 is a perspective view of a rigid container in an embodiment of this invention.

[0007] Fig. 2 is a perspective view of a bulk bag in an embodiment of this invention.

[0008] Fig. 3 is a side view in cross section illustrating the embodiment of Figs. 1 and 2 during use to move material into the bulk bag of Fig. 2.

[0009] Fig. 4 is a side view in cross section similar to that of Fig. 3, but illustrating an embodiment of this invention for removing liquid from a slurry material placed in a liquid permeable bulk bag within a rigid container in accordance with this invention.

[0010] Fig. 5 is a view similar to that of Fig. 4, showing the system of Fig. 4 during operation to remove

a liquid from the material within the bulk bag.

[0011] In each of the above figures, like numerals or letters are used to refer to like or functionally like parts among the several figures.

### DETAILED DESCRIPTION OF THE INVENTION

[0012] The accompany figures illustrate preferred embodiments of this invention. Fig. 1 illustrates a rigid container 10 for use in a preferred apparatus of this invention. Container 10 provides an inlet port 12 and an outlet port 14, a first secondary port 11 and a second secondary port 13. Container 10 is sized and configured to define a first volume V for receiving a liquid, solid particulate or slurry material. During typical use of the apparatus, inlet port 12 is in fluid communication with a suction pipe 15 (Fig. 3). The apparatus of Fig. 1 can be used with a flexible, substantially non-porous bag 16 (see Fig. 2) which forms a bag opening perimeter 18 for sealed attachment to container 10 at inlet port 12. As illustrated in Figs. 2 and 3, bag 16 is in an initial deflated state prior to installation in container 10. As further illustrated in Fig. 3, the apparatus further includes a jet pump P in fluid communication with container 10 through outlet port 14. During operation of pump P, a vacuum is created within container 10 to thereby cause bag 16 to expand and form a vacuum within bag 16, which causes material to be drawn through the suction pipe 15 and inlet port 12 into bag 16. While not required, it is particularly preferred that the free end (not shown) of suction pipe 15 be completely immersed in the material to be suctioned so that the amount of air allowed to enter suction pipe 15 is minimized.

[0013] Although not necessarily shown in the drawings, it is particularly preferred that ports 11 and 13 be as close to the bottom of container 10 as possible so that these ports may be conveniently used to empty container 10 of substantially all of its contents, especially standing liquids, as necessary.

[0014] As seen from the preferred embodiment of this invention illustrated in Figures 4 and 5, the apparatus can also employ a flexible, substantially porous bag 17 to thereby enable liquids in the material brought into bag 17 to be separated from the slurry to thereby filter the solids and permit removal of the separated liquids from container 10. In particular, container 10 may be placed in fluid communication with



and intermediate liquid tank T through a conduct C, tank T in turn being in fluid communication with vacuum jet pump P. In this particular embodiment, it is preferred that the vacuum connection to container 10 be made at port 13 (rather than port 14 as shown in the embodiment of Figs. 1-3), to facilitate removal of liquids from container 10 during operation of pump P. Operation of pump P to create sufficient vacuum causes slurry material to enter bag 17 and draws liquids through the pores in bag 17 to separate the liquids from the solids, and to draw the liquids into tank T. If even further liquid removal from the contents of bag 17 is desired, this embodiment provides a way to accomplish the same. While container 10 is substantially sealed at outlet 14 (and inlet 12) and port 11 but in fluid communication with tank T via conduct C and secondary port 13, a man way cover 30 may be opened, the opening constituting the bladder port across which may be placed a substantially non-porous bladder B so that, when in place and when man way cover 30 is substantially shut but a valve (not shown) at cover 30 is opened to the surrounding atmosphere, operation of pump P causes formation of a vacuum in the volume defined by bladder B and the walls of container 10, thereby causing bladder B to expand into container 10 and the press against the contents of bag 17. As the vacuum is maintained, additional liquids are removed from the solids remaining in bag 17 and suctioned into tank T. In this way, slurry materials can be substantially de-watered, removing in some cases 98% or more of the liquids previously present in the slurry material. Tank T as depicted includes a drainage pipe and valve, through which tank T could be emptied by opening the valve or through a connection to a tank pump (not shown). It will now be appreciated that this could also be achieved with the illustrated apparatus through application of fluid pressure (water or a gas) through the valve (or a different valve) at cover 30 so as to cause bladder B to expand into container 10 sufficiently to contact bag 17 to encourage additional fluid to separate from the contents of bag 17.

[0015] Typically, container 10 will be emptied by unhooking slurry pipe 15 at port 12, then closing or tying off bag 16 (or 17) at its perimeter 18, and closing port 12 for transportation of container 10. To unload container 10, a door 19 of container 10 may be opened to access and remove bag 16 (or 17) and its contents.



[0016] The non-porous bladder employed in certain embodiments of the present invention may be formed from a variety of materials, but is typically formed from non-porous flexible sheets or film such as, e.g., the Firestone product marketed under the brand PONDGARD, or the like. The material should be sufficiently flexible to enable the bladder to expand during operation of the apparatus so as to permit an efficient vacuum to be formed in the volume formed by the container walls and the bladder, thereby enabling removal of additional liquid material from the contents of the porous bag within that volume formed by the container walls and the bladder.

[0017] The vacuum container employed in the embodiments of this invention should be sufficiently rigid to withstand the vacuum necessary to facilitate use of the system, all inlets, outlets and ports defined by the walls of the container should be equipped with fittings and seals which enable a vacuum to be maintained within the container. Conventional containers known as vacuum roll-off containers, for example, can be modified for use as the vacuum container in accordance with this invention when commercial operations call for transportation, disposal or storage of large volumes of material.

[0018] The level of vacuum to be maintained within the container will vary depending upon the ambient pressure and temperature conditions, the nature of the material to be moved, the size of the vacuum container and related equipment and the physical characteristics of the bulk bag employed. As a non-limiting example, when employing a vacuum roll-off container of the size of about 25 cubic yards (22.86 cubic meters) and a bulk bag of the size of about 25 cubic yards (22.86 cubic meters) made from coated polypropylene sheet material, the vacuum provided to move about 20 cubic yards of slurry material into the bag, the material having an average particle size of about 3 inches or less and a weight of about 2000 pounds per cubic yard, within a period of time of about 20 minutes at room temperature and pressure, is in the range of about 10 to about 15 inches Hg.

[0019] The bulk bags employed in the systems of this invention will typically be sized in a fashion consistent with the size of the rigid container employed, but are preferably somewhat smaller than the container to avoid having excess bag material within the container which might foul the vacuum operation.

Commercial vacuum roll-off containers suitable for use in the systems of this invention are typically in the range of about 25 to about 30 cubic yards (about 22.86 to about 27.43 cubic meters) in volume size. For a container of the size of 25 cubic yards, the bag will typically be in the range of about 3000 to about 5050 gallons, depending on the application. The material used to fabricate the bulk bags will depend upon the application. For applications requiring a substantially air and liquid impervious material, non-limiting examples of suitable material include coated woven polypropylene or a non-coated polyethylene film material. Such material is sold under the brand and product identifier "PE" by the First Line Corporation of Valdosta, Georgia. For applications which require a substantially liquid permeable material for fabrication of the bag, and non-limiting example of suitable material is non-coated, woven or unwoven polypropylene. Such material is sold under the brand and product identifier "PP/Non-Coated" by the Linq Industrial Fabrics of Summerville, South Carolina. In all cases, the material thickness may vary depending upon the strength requirements for the material to be placed in the bag.

[0020] The vacuum pump employed to produce the necessary vacuum within the vacuum container may vary and could be virtually any pump capable of generating a vacuum. Commonly employed pumps will include centrifugal vacuum pumps, jet pumps, or the like. However, in preferred embodiments, the vacuum pump is one which is capable of creating a vacuum in a substantially sealed volume without any meaningful air intake into the sealed volume. In one preferred embodiment, the pump is a jet pump substantially like that which is taught in commonly owned U.S. Patent 6,322,327, and commonly owned and co-pending U.S. Patent Application No. 10/388,780, filed on March 14, 2003. The pump described in the latter patent application, commonly known as the Pearce Closed Loop Vacuum System marketed by Pearce Pump Supply, Inc. of Prairieville, Louisiana, is particularly preferred for its ability to achieve a high vacuum and to maintain the vacuum under dry or wet conditions, its ease of maintenance as compared with conventional mechanical pumps and its ability to re-circulate the motive fluid which drives the jet pump.

[0021] Each and every patent, patent application and printed publication referred to above is incorporated herein by reference *in toto* to the fullest extent permitted as a matter of law.

[0022] It should be appreciated that, while specific embodiments are described hereinafter, several other applications of the presently described invention may be contemplated by those of skill in the art in view of this disclosure. Accordingly, the scope of this invention is not limited to the specific embodiments described in detail herein. The following claims are exemplary, and should not be construed as the only or the broadest claims which might be made based upon the disclosure of this application.

**Claims:**

1. Apparatus comprising
  - (a) a substantially rigid container defining at least one inlet port and at least one outlet port, and being sized and configured to define a first volume for receiving a liquid, solid particulate or slurry material;
  - (b) a flexible, substantially non-porous bag which forms a bag opening perimeter in sealed attachment to the container at the inlet port and being in an initial deflated state; and
  - (c) a vacuum pump in fluid communication with the rigid container through said outlet port, wherein during operation of the vacuum pump, a vacuum is created within the rigid container to thereby cause the bag in an initial deflated state to expand and form a vacuum within the bag to draw material through the inlet port and into the bag.
2. Apparatus according to Claim 1, wherein the outlet port is disposed relative to the inlet port so as to avoid drawing the bag or material within the bag into the outlet port during operation of the vacuum pump.
3. Apparatus comprising
  - (a) a substantially rigid container defining at least one inlet port, at least one outlet port and at least one sealable bladder port, and being sized and configured to define a first volume for receiving a liquid, solid particulate or slurry material;
  - (b) a flexible, substantially porous bag which forms a bag opening perimeter in sealed attachment to the container at the inlet port and being in an initial deflated state; and
  - (c) a vacuum pump in fluid communication with the rigid container through said outlet port, wherein during operation of the vacuum pump, a vacuum is created within the rigid container to thereby cause the bag in an initial deflated state to expand and form a vacuum within the bag to draw material through the inlet port and into the bag.





4. Apparatus according to Claim 3, wherein the outlet port is disposed relative to the inlet port so as to avoid drawing the bag or material within the bag into the outlet port during operation of the vacuum pump.
5. Apparatus according to Claim 3, further comprising
  - (d) a substantially non-porous bladder which forms a bladder perimeter configured for substantially sealed attachment to the container at the bladder port, so that when the bag contains slurry material and the bladder is attached to the bladder port and the bladder port is unsealed to the surrounding atmosphere, vacuum created within the rigid container may cause the bladder to expand into the container to encourage liquid from the contents of the bag to pass through the bag and out of the rigid container through the outlet port.
6. Apparatus according to Claim 5, further comprising a intermediate receiving tank in fluid communication with the vacuum pump and the outlet port, configured to receive liquid which passes through the outlet port during operation of the vacuum pump.
7. Apparatus according to Claim 6, wherein the outlet port is disposed relative to the inlet port so as to avoid drawing the bag or material within the bag into the outlet port during operation of the vacuum pump.
8. Apparatus according to Claim 3, further comprising
  - (d) a substantially non-porous bladder which forms a bladder perimeter configured for substantially sealed attachment to the container at the bladder port, so that when the bag contains slurry material, the bladder is attached to the bladder port, the bladder port is unsealed and a pressurized fluid outside of the container is applied to the bladder, the bladder expands into the container to encourage liquid from the contents of the bag to pass through the bag.
9. Apparatus according to Claim 8, further comprising a intermediate receiving tank in fluid

communication with the vacuum pump and the outlet port, configured to receive liquid which passes through the outlet port during operation of the vacuum pump.

10. Apparatus according to Claim 9, wherein the outlet port is disposed relative to the inlet port so as to avoid drawing the bag or material within the bag into the outlet port during operation of the vacuum pump.

Title: Vacuum Container System And Related Method  
Inventor: Richard F. Dawson et al.  
Attorney Docket No.: S-817

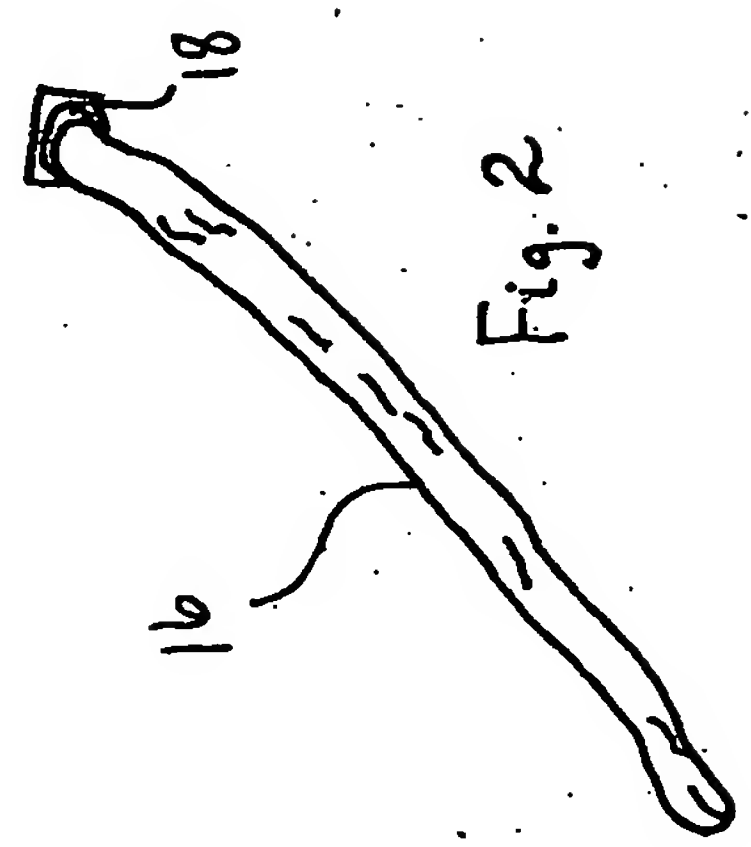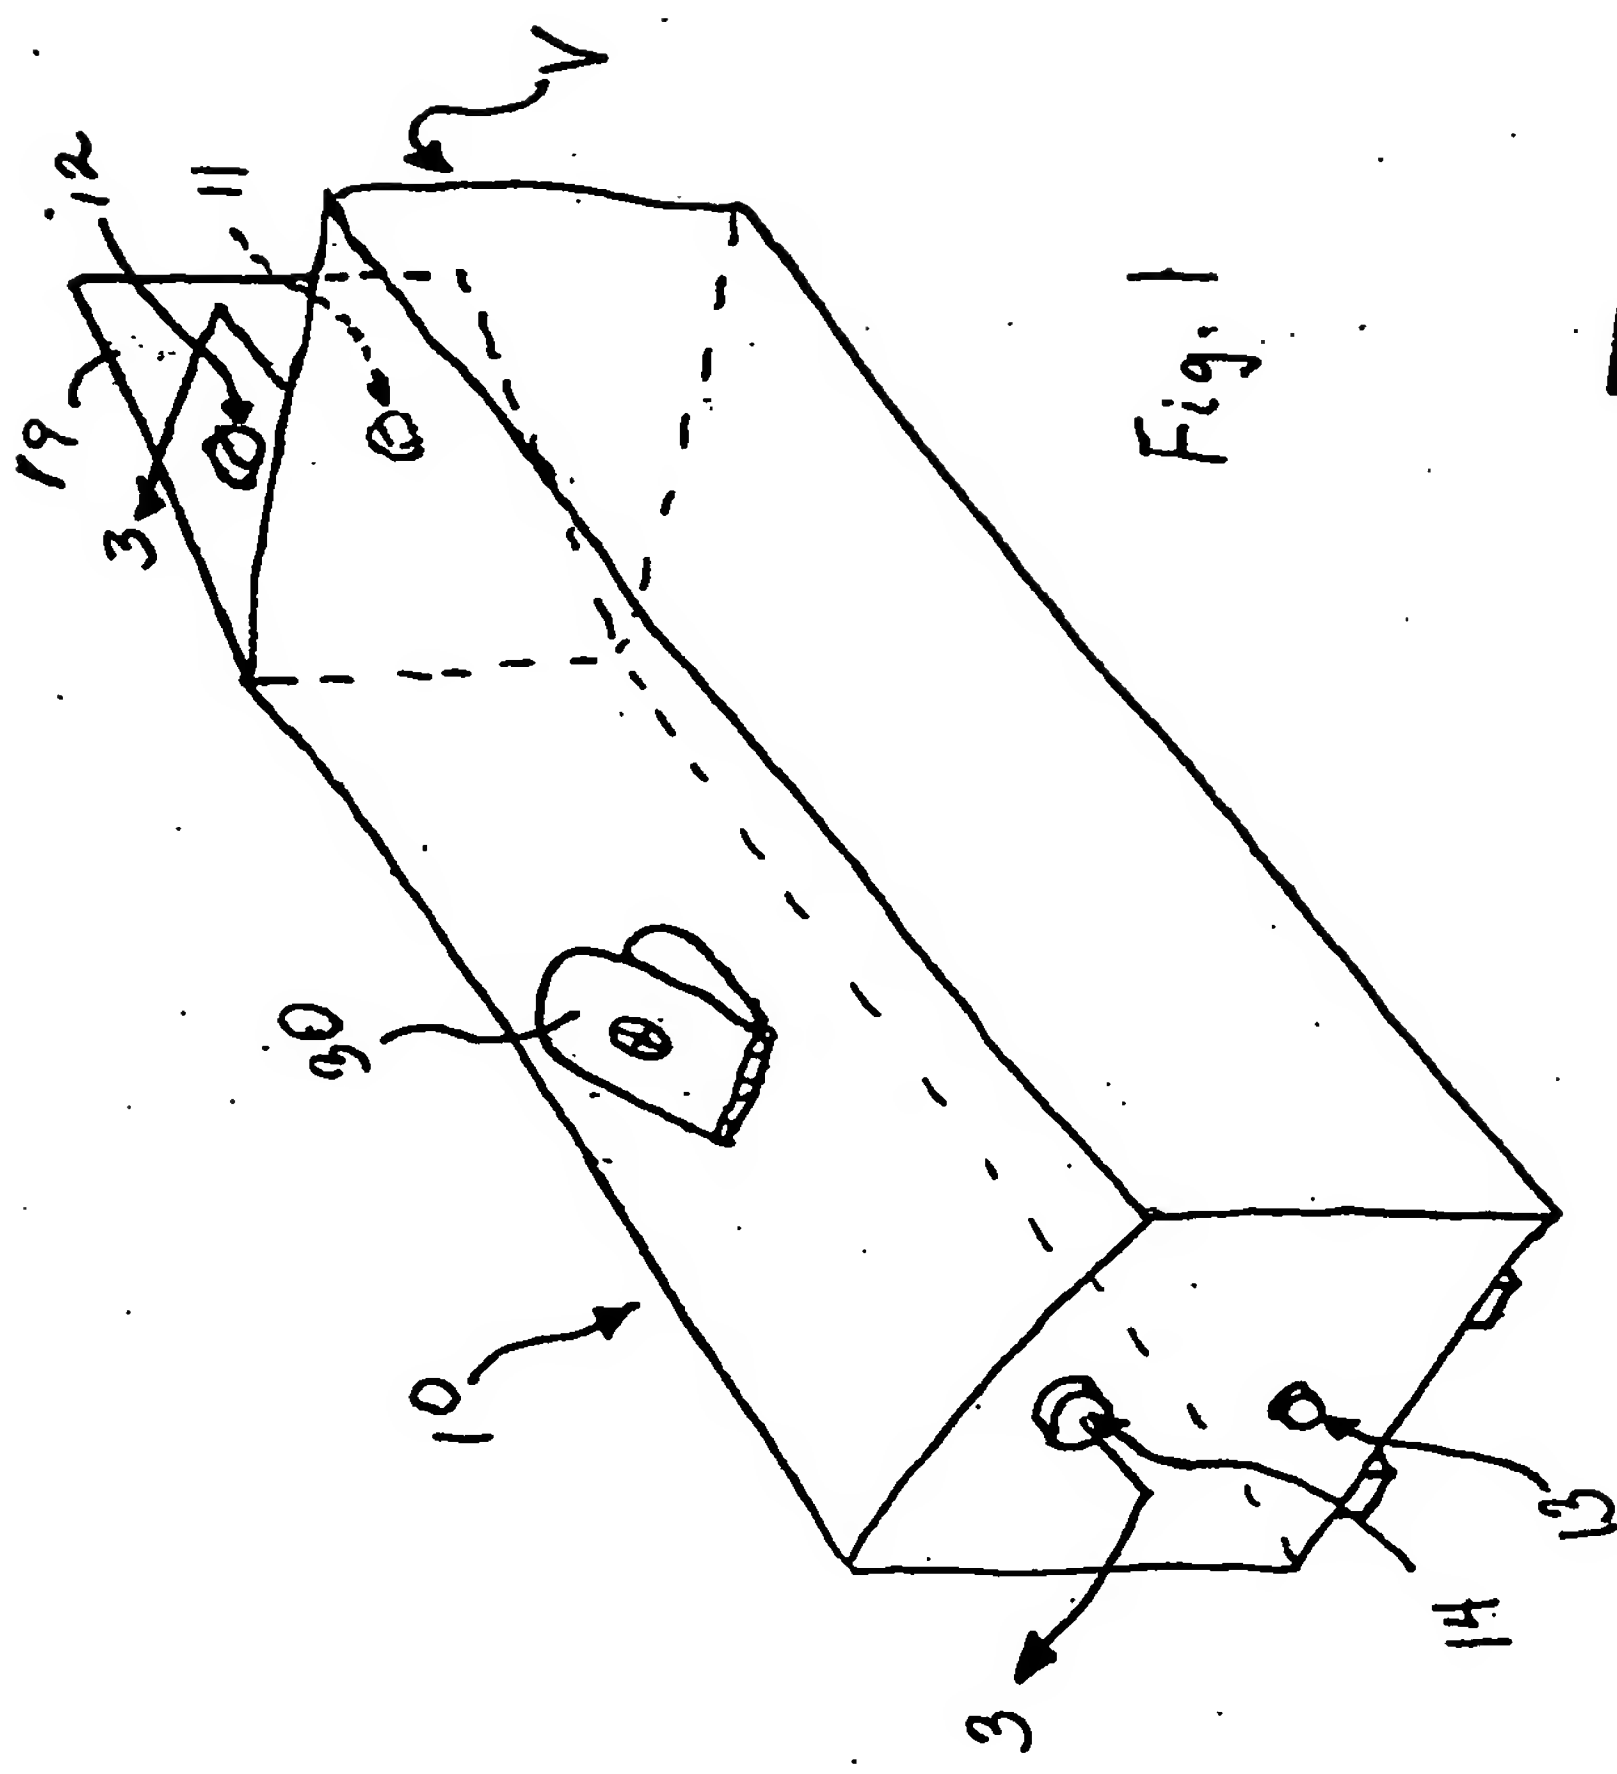

Title: Vacuum Container System And Related Method  
Inventor: Richard F. Dawson et al.  
Attorney Docket No.: S-817

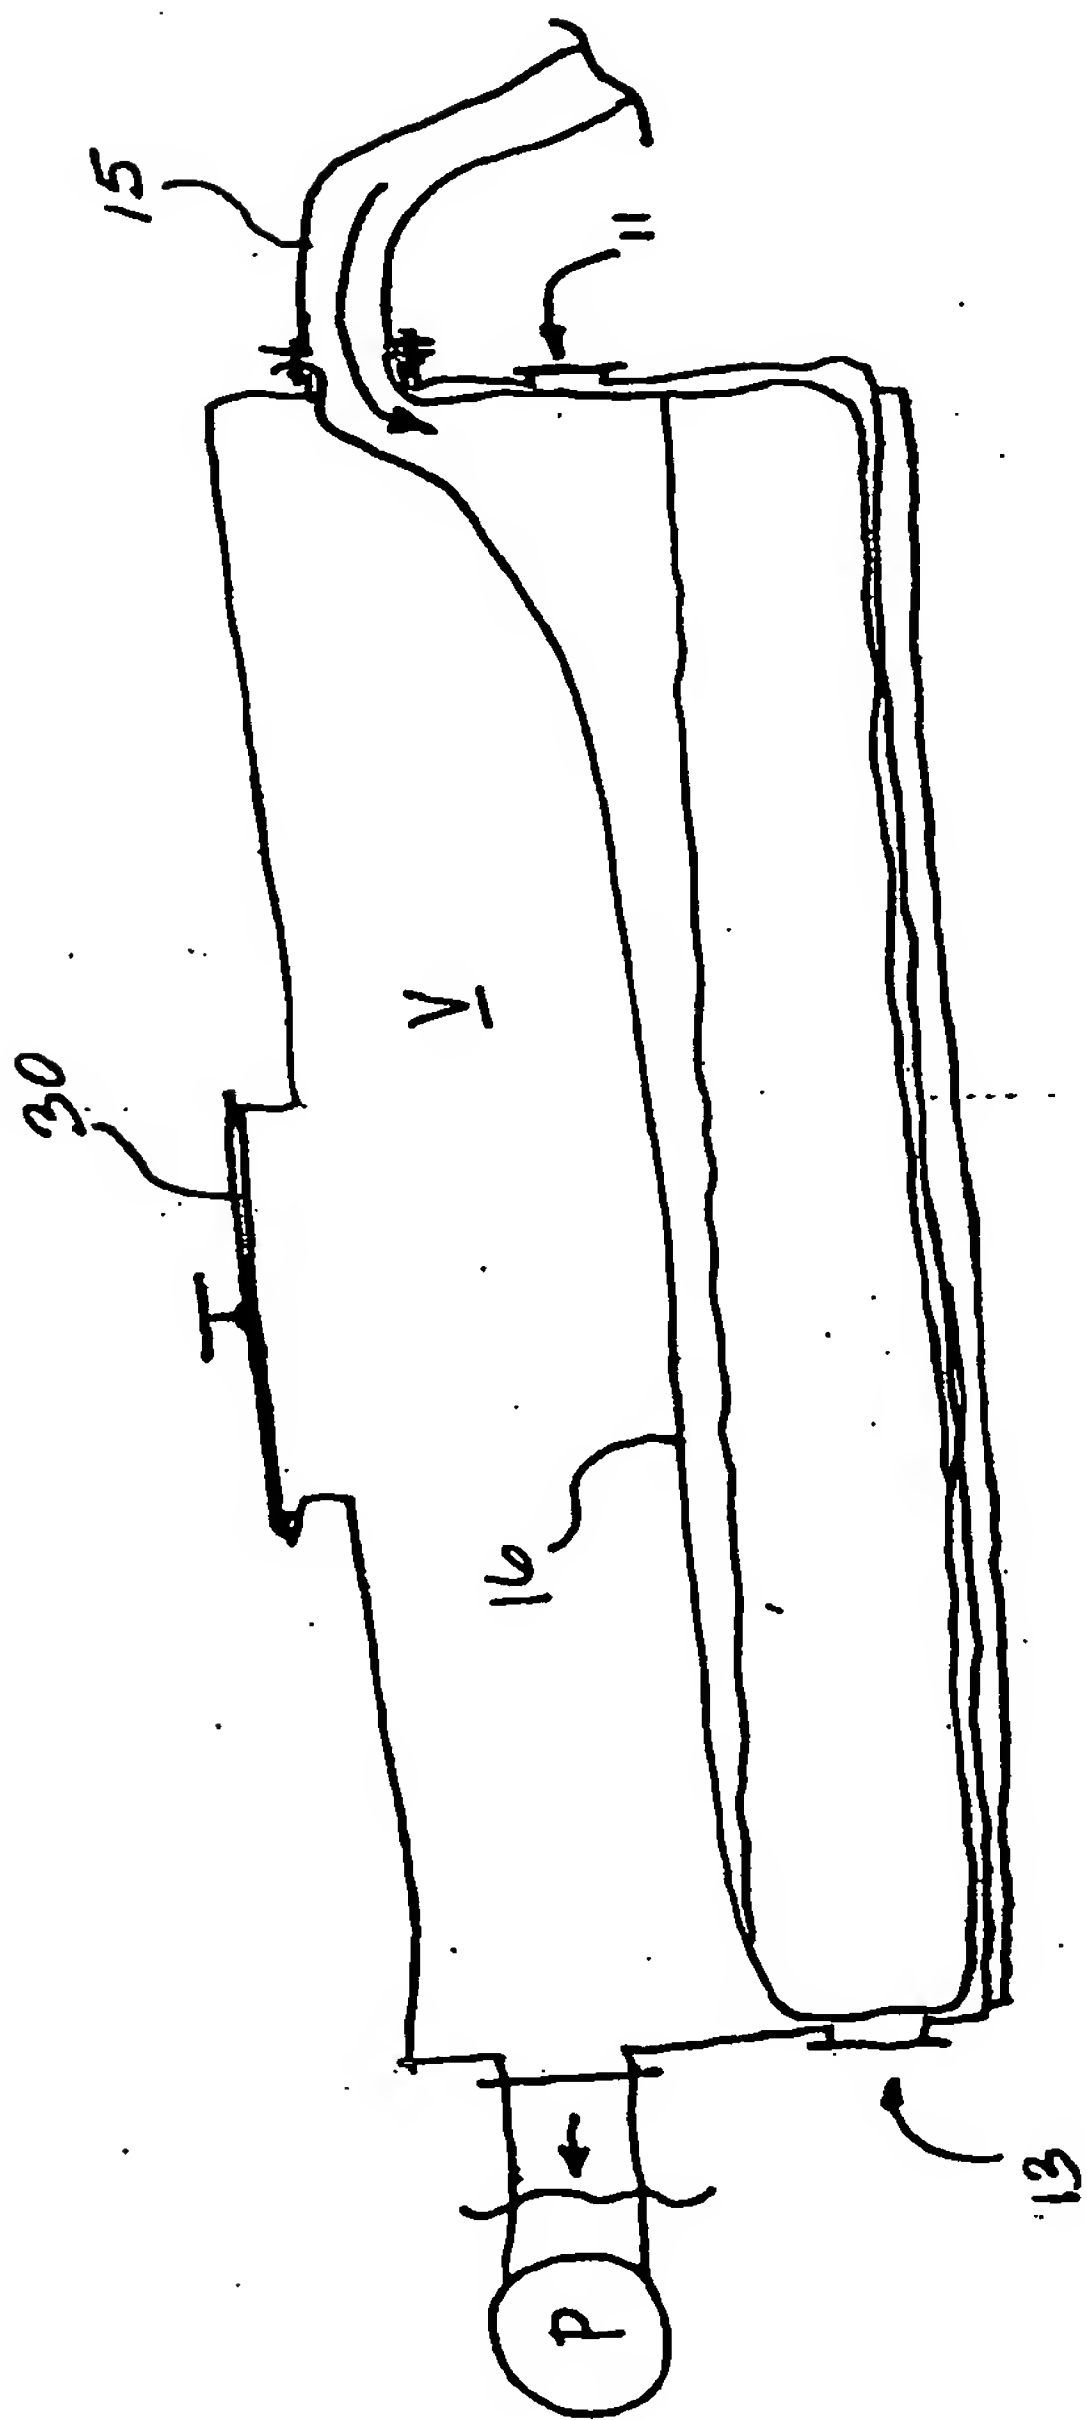


Fig. 3



Title: Vacuum Container System And Related Method  
Inventor: Richard F. Dawson et al.  
Attorney Docket No.: S-817

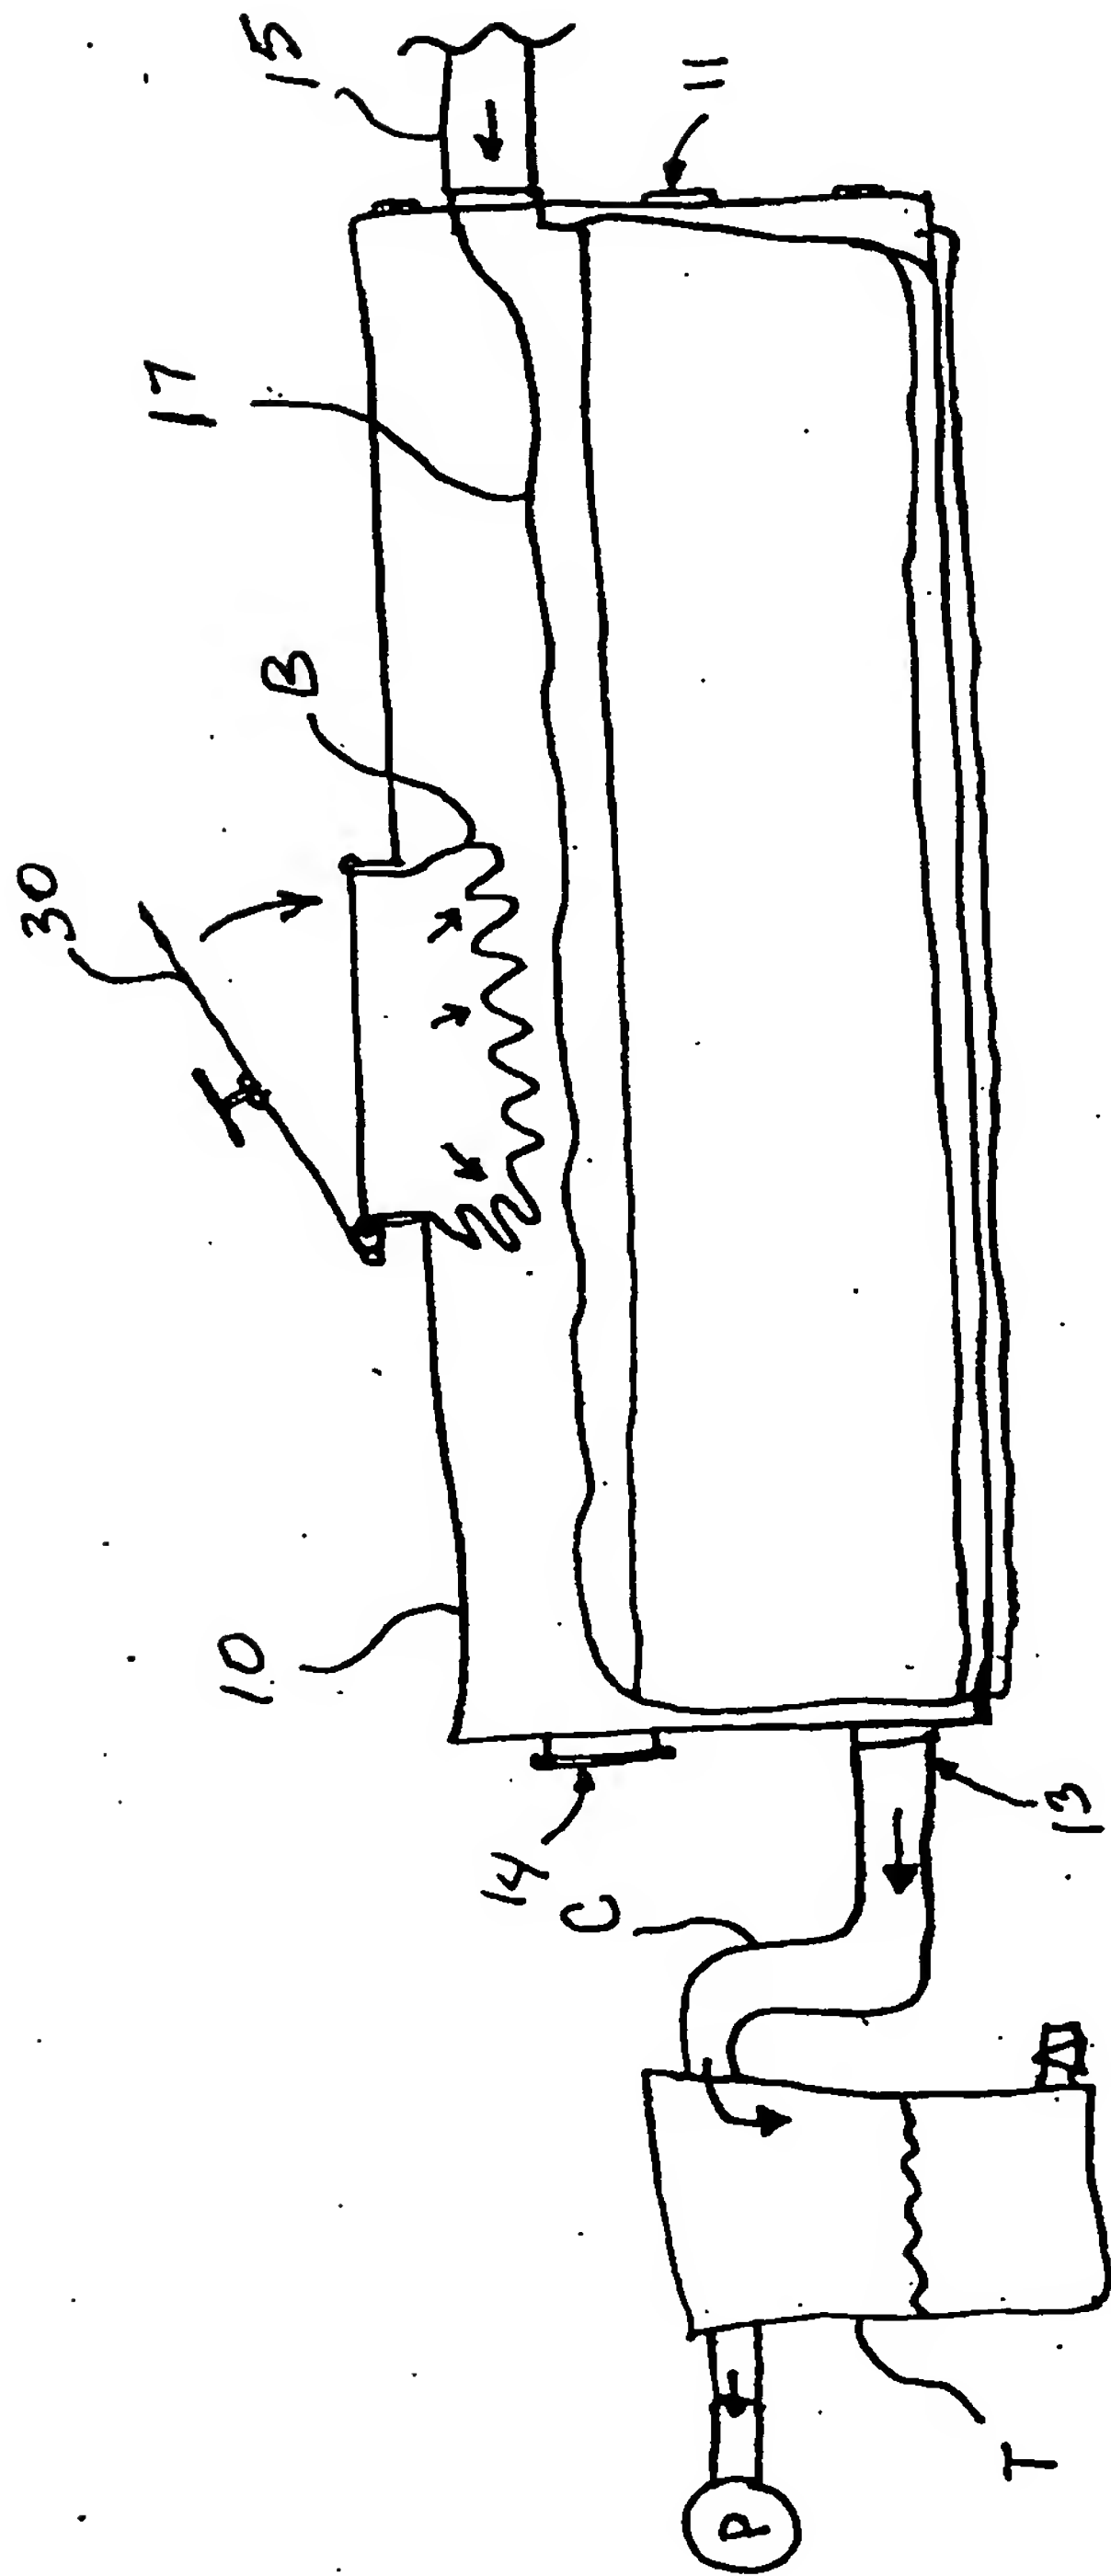


Fig. 4

Title: Vacuum Container System And Related Method  
Inventor: Richard F. Dawson et al.  
Attorney Docket No.: S-817

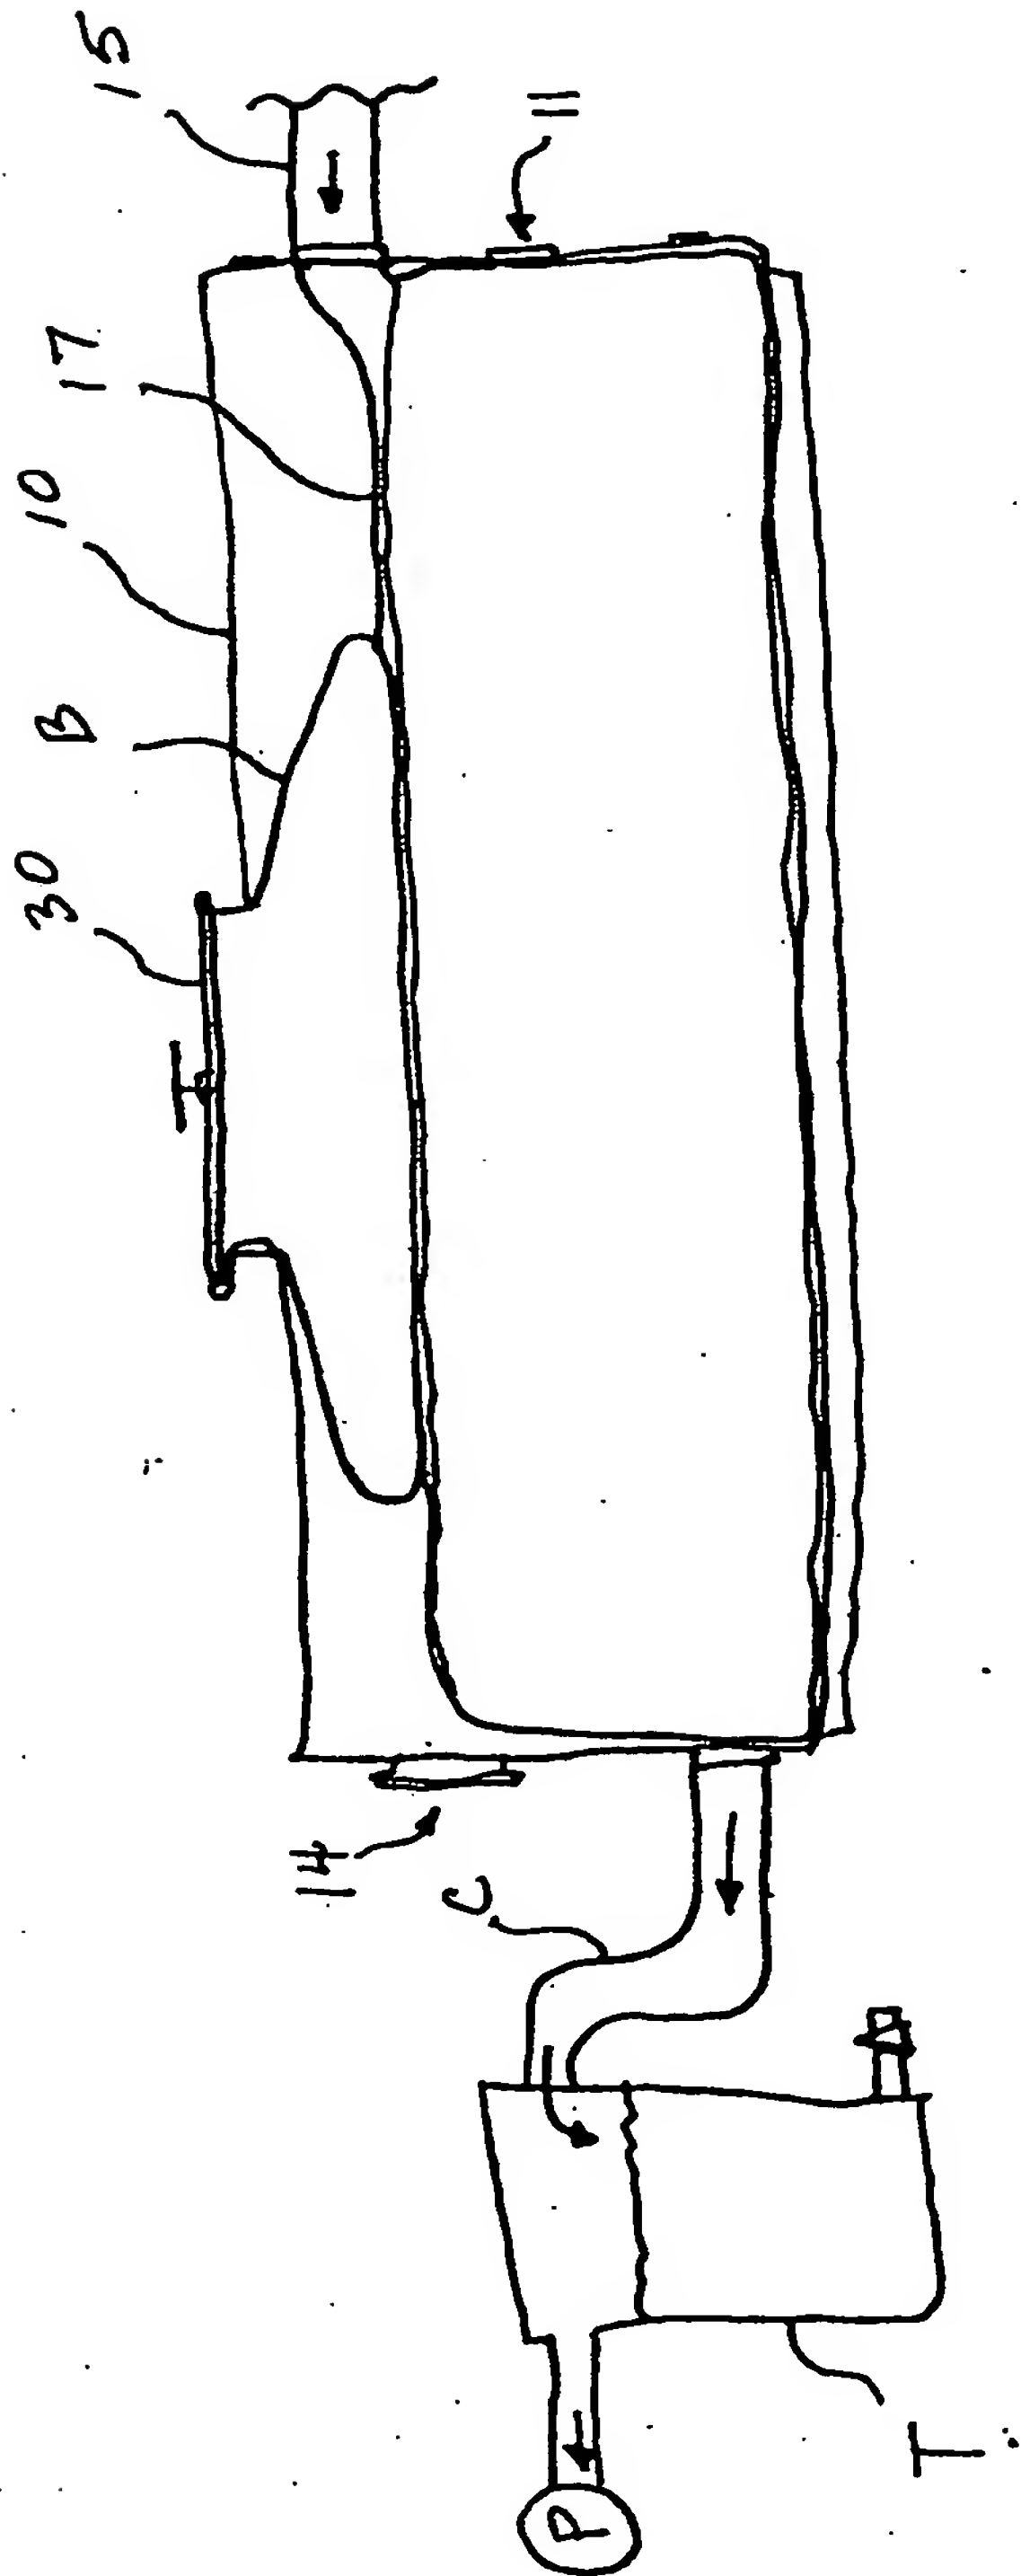


Fig. 5